


Esempi di Oblò e finestre subacquei per Piscine in Muratura



1000X500 con flangia intera viti bombate

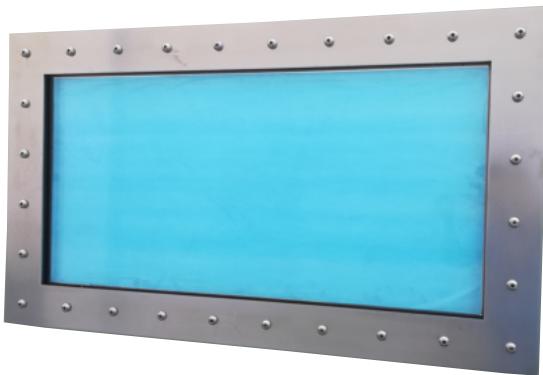


900X400 con flangia composta viti svasate



Ø 600 con imbotte anche Ø 380



Standard su membrana Ø 380



Ø 500



Ø 800

Caratteristiche tecniche

Realizzati in acciaio inox AISI 316^L - Lucidi - Satinati
Telaio inox 304 Grezzo
Le pareti devono essere complanari e liscie
Telaio e visiva presigillati
Temperatura d'esercizio: - 20°C + 100°C
Guarnizioni siliconiche grigie - Neoprene
Resistenti agli additivi presenti nell'acqua
Tutti i materiali sono certificati
Garanzia a termini di legge per la profondità richiesta
Attacco-Messa a terra per elettrolisi

Ci riserviamo il diritto di apportare modifiche in qualsiasi momento
We reserve the right to make modifications at any time

DITTA COLOMBO GIOVANNI DI STEFANO COLOMBO

25020 FENILI BELASI - CAPRIANO DEL COLLE - BS - ITALIA - VIA INDUSTRIALE 164
TEL. +39 030 9747592 - www.colombogiovanni.it - e-mail: info@colombogiovanni.it

Technical particulars

Made of AISI 316^L stainless steel - Polished - Satin
Stainless steel 304 frame
The walls must be coplanar and smooth
Frame and sight pre-sealed
Working temperature: - 20°C + 100°C
Gray silicone gaskets - Neoprene
Resistant to additives in the water
All materials are certified
Warranty according to the law for required depths
Grounding connection for electrolysis